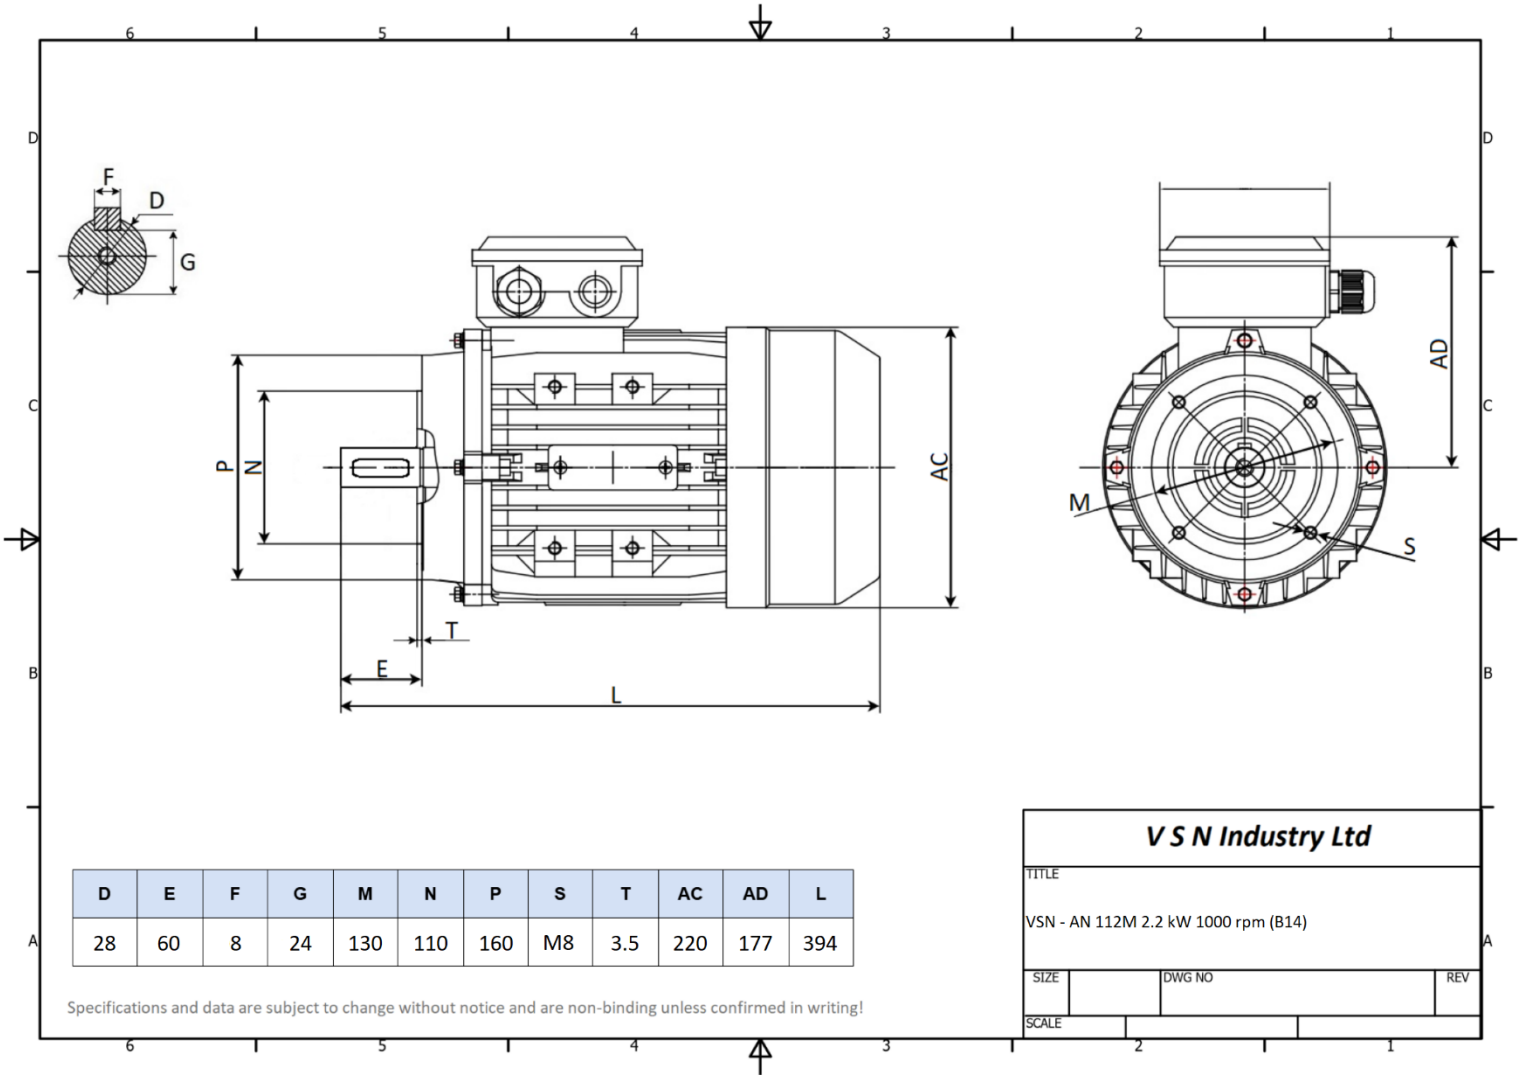


D	E	F	G	M	N	P	S	T	AC	AD	L
28	60	8	24	130	110	160	M8	3.5	220	177	394

Standards	IEC 60034	**Efficiency class**	IE1
Manufacturer	V S N Industry Ltd	**Load**	100%
Brand	V S N Drive Systems	**Efficiency**	77.7 %
Motor type	AN - 112M1 - 6	**Power factor**	0.76
Rated power	2.2 kW	**Sound pressure level (1m)**	67 db(A)
Rated speed	950 rpm	**Resistance R20 (open)**	
Duty	S3 70%	**Resistance R20 (Delta)**	
Mounting	IM B14		
Voltage	230 V / 400 V	**Full load torque**	22.3 Nm
Frequency	50 Hz	**Starting torque / Rated torque (Tst/Tn)**	2.0
Connection	Delta / Star	**Pull-up torque / Rated torque (Tmin/Tn)**	
Full load current	9.35 A / 5.38 A	**Maximum torque / Rated torque (Tmax/Tn)**	2.1
No-load current			
Degree of protection	IP55		
Insulation class	F (temp. rise B)		
Max. ambient temp	40 °C	**Starting current / Rated current (Ist/In), DOL**	6.5
Max. altitude	1000 m above sea level	**Starting current / Rated current (Ist/In), Y/D**	
Cable entry	M25 x 1.5	**Rotor inertia**	
Housing material	Aluminium	**Bearing DE**	6206
Weight	24.8 kg	**Bearing NDE**	6206